

EV Charger



SMART EV CHARGER

X1-EVC
7.2kW

X3-EVC
11kW / 22kW



High Efficiency

- Capable of 100% green energy
- Maximizes surplus green energy utilization in a zero-export system



Assured Safety

- Current leakage protection (30mA AC & 6mA DC)
- Smart dynamic load balance control



Intelligent Design

- Smart RFID management function
- Smart APP remote control




Flexible Adaptability

- Selectable plug or socket outlet
- Easy indoor and outdoor installation

	X1-EVC-7.2K	X3-EVC-11K	X3-EVC-22K
AC NOMINAL INPUT			
Phases/Lines	Single phase	Three phase	Three phase
Voltage	1 / N / PE, 230 V	3 / N / PE, 230 / 400 V	3/N/PE, 230 / 400 V
Frequency	50 ± 5 Hz / 60 ± 5 Hz	50 ± 5 Hz / 60 ± 5 Hz	50 ± 5 Hz / 60 ± 5 Hz
AC NOMINAL OUTPUT			
Voltage	1 / N / PE, 230 V	3 / N / PE, 230 / 400 V	3 / N / PE, 230 / 400 V
Current	32 A	16 A	32 A
Power	7.2 kW	11 kW	22 kW
INTERFACE			
Wireless module		Wi-Fi 2.4GHz	
Ethernet		10 / 100 M	
RS485		Yes	
RFID		Yes	
OCPP 1.6 (JSON)		Yes	
LCD screen		Optional	
CT clamps	X1	X3	X3
GENERAL DATA			
Housing material	Plastic / Metal		
Installation method	Wall-mount / Pedestal-mount (Optional)		
Wall-mount bracket	Yes		
Charging outlet	Type P (Charging cable with plug) / Type S (Socket-outlet)		
Cable length	6.5 m (Type P)		
Operating temperature	-30 ~ 50°C		
Working humidity	5 ~ 95% RH (non-condensing)		
Working altitude	< 2000 m		
Degree of protection	IP65		
Impact resistant	IK10 (Housing) / IK08 (LCD screen)		
Application site	Indoor / Outdoor		
Cooling concept	Natural cooling		
Dimension (W x H x D)	249 x 370 x 155 mm (for type S) / 265 x 370 x 155 mm (for type P)		
Net weight	7 kg (for type S) / 10.5 kg (for type P)		
PROTECTION			
Multiple protection	Over/Under voltage protection, Overload protection, Shortcircuit protection, Current leakage protection, Grounding protection, Surge protection, Overtemperature protection		
Integral earth leakage protection	Integrated current failure monitoring (30mA AC & 6mA DC)		
Built-in pen fault technology ^①	According to BS 7671:2018 requirements		
Safety standard	IEC 61851-1:2017, IEC 62196-2:2016		
Encrypted communication	TLS		
Certification	CE, UKCA, LVD, EMC, RED		

① Only for chargers sold in the UK region

Solution

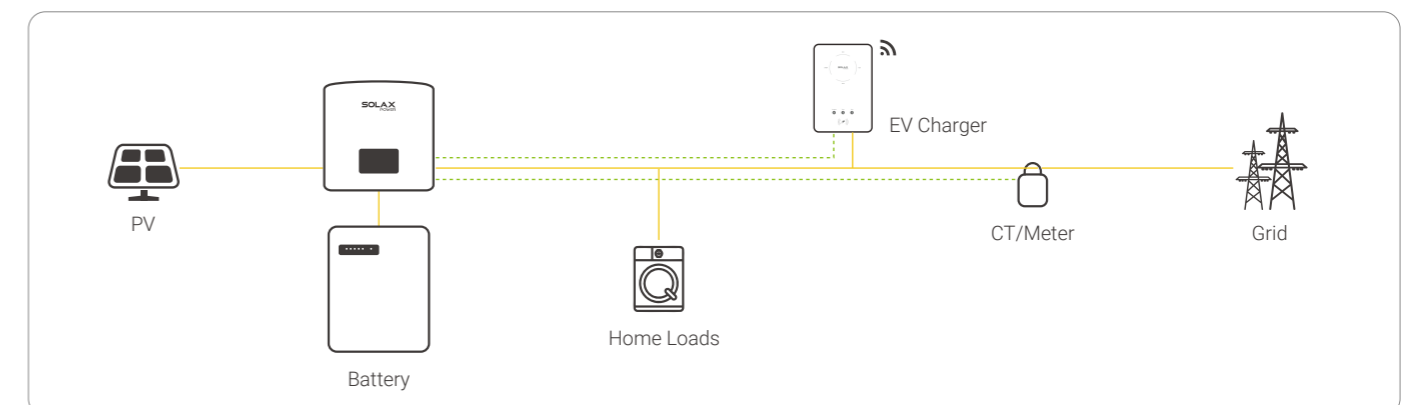

EV Charger



Smart EV Charger G2

X1-HAC-4 / X1-HAC-7
X3-HAC-11 / X3-HAC-22



High Efficiency

- Capable of 100% green energy
- Automatic switch between one and three phases
- Maximizing surplus green energy utilization in a zero-export system



Assured Safety

- Current leakage protection (30mA AC & 6mA DC)
- Smart dynamic load balance control



Intelligent Design


- Smart RFID management function
- Smart APP remote control



Flexible Adaptability

- Selectable plug or socket outlet
- Easy indoor and outdoor installation
- Supports multiple communication protocols

Solutions

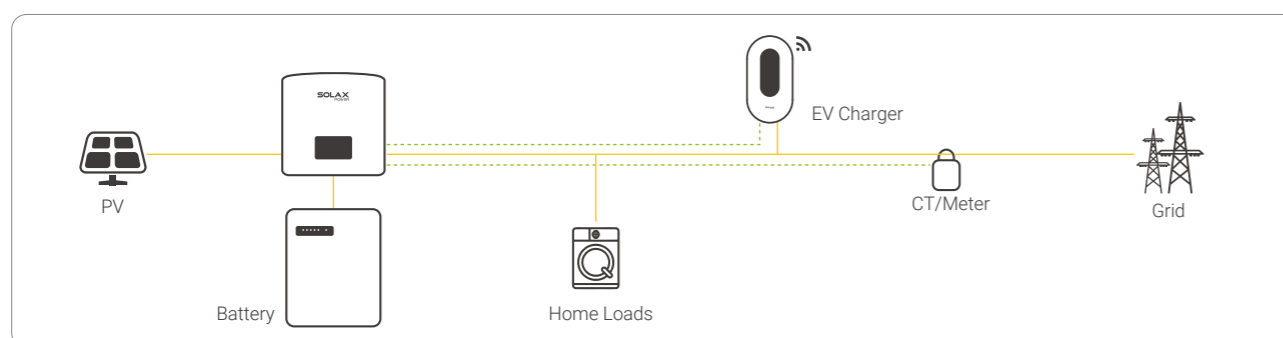

	X1-HAC-4	X1-HAC-7	X3-HAC-11	X3-HAC-22
AC NOMINAL INPUT				
Voltage	230 V	230 V	400 V	400 V
Frequency	50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz	50 Hz / 60 Hz
Grid earth type	TN, TT, IT	TN, TT, IT	TN, TT, IT	TN, TT, IT
AC NOMINAL OUTPUT				
Voltage	230 V	230 V	400 V	400 V
Current	6-20 A (single phase)	6-32 A (single phase)	6-16 A (single phase or three phase)	6-32 A (single phase or three phase)
Power	1.4 ~ 4.6 kW	1.4 ~ 7.2 kW	1.4 ~ 11 kW	1.4 ~ 22 kW
INTERFACE & COMMUNICATION				
Communication interface	WiFi / Ethernet / 4G (Optional) / RS 485 x 2			
Protocol	OCPP 1.6j, Modbus TCP, Modbus RTU, Cloud API			
Communicate	IEC 61851-1, ISO 15118 (Optional)			
Authentication	Plug & Charge / RFID (ISO-14443-A) / APP			
MID meter	External (Optional)			
HMI	RGB LED / APP / LCD (Optional)			
Remote control	APP & Web			
Applicatio	Residential / Destination place / Public			
GENERAL DATA				
Housing material	PC			
Installation method	Wall / Pedestal (optional)			
Charging outlet	Type2 plug / Type2 socket (IEC 62196)			
Cable length	6.5 m (Type P)			
Operating temperature	-30 ~ 50°C			
Storage temperature	-40 ~ 60°C			
Working humidity	5% ~ 95% RH (non-condensing)			
Working altitude	2000 m			
Degree of protection	IP65 (For plug type) / IP54 (For socket type) IK10 (Housing) / IK08(Screen)			
Cooling method	Nature cooling			
Application site	Indoor / Outdoor			
Weight	5 kg for plug type	3 kg for socket type 5 kg for plug type	3 kg for socket type 6.5 kg for plug type	3 kg for socket type 6.5 kg for plug type
Dimension (W x H x D)	390 x 206 x 139 mm			
PROTECTION				
Multiple protection	Over/Under voltage protection, Overload protection, Shortcircuit protection, Current leakage protection, Grounding protection, Surge protection, Overtemperature protection			
Theft protection	Support theft protection with a padlock			
Integral earth leakage protection	Integrated current failure monitoring (30 mA AC & 6 mA DC)			
Cable protection	Cable lock (APP control)			
Relay protection	Relay weld detection			
Built-in PEN fault technology	According to BS 7671:2018 requirements ^①			
Standard	IEC 61851-1:2017, IEC 62196-2:2016			

① Only for chargers sold in the UK region